

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.



LANDA[®]
illuminotecnica

Lyra 130


| |
|--|
| Article 463H20 |
| Product type ceiling |
| Body material Die-casting aluminium EN47100 and in extruded aluminium, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation. |
| Tempered glass diffuser in transparent 10mm thick and silicon gasket. |
| Reflector in aluminum |
| Screws in A2 stainless steel |
| Colours available: Metalgrey and Graphite |
| |

IK08
IP66 - 850°C

PGJ5 1 x 20W
Metalhalide
Reflector beam 45°

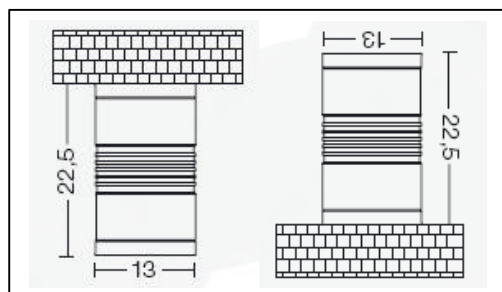

Photometric:

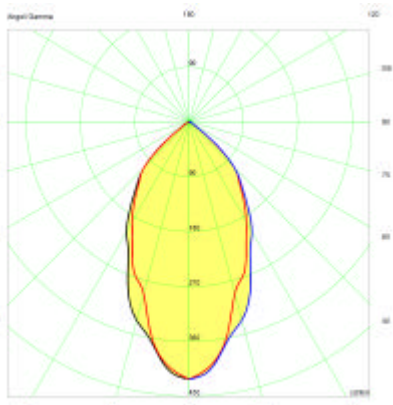

| CODE 463H20X1 Beam 30 | |
|-----------------------|------|
| MT | LUX |
| 0.5 | 2785 |
| 1 | 696 |
| 1.5 | 309 |
| 2 | 174 |
| 2.5 | 111 |
| 3 | 77 |
| 4 | 45 |
| 5 | 28 |

