

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.


LANDA[®]
illuminotecnica

Lyra 80

Article 466GU5.3
Product type spot or projector
Body material Die-casting aluminium EN47100 and in extruded aluminium, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in transparent 10mm thick and silicon gasket.
Reflector.
Screws in A2 stainless steel
Colours available: Metalgrey and Graphite
Included: 1 mt of cable H05RN-F, single connector IP68, ceiling/wall mounting plate.

IK08
IP66 - 850°C



GU5,3 35W 12V
GU5,3 4W 12V LED
Max bulb dimension




IP6X



IPX6

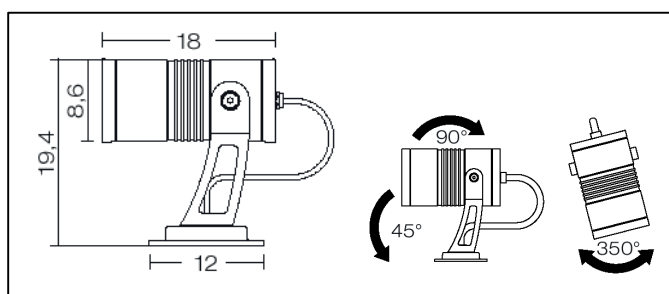

Photometric:

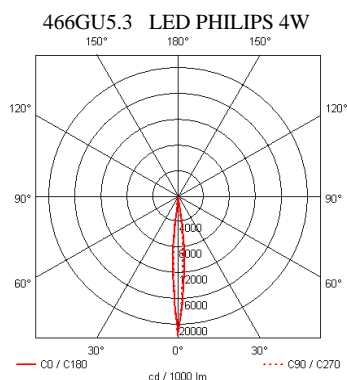

accessories



code 00K465.02
Reflector
for art. 466-467-468



code 00A465
Mounting spike
for art. 466-467



code 00K465.01
Visor
for art. 466-467

For external use only



code 0404M003
Loop in loop out IP68
for art. 466-467