

# Technical data sheet

All right reserved Landa illuminotecnica S.p.A.  
will reserve to change the specific note without  
any written notice.


**LANDA**<sup>®</sup>  
illuminotecnica

## Lyra 80

Article 467GU5.3
Product type spot or projector
Body material Die-casting aluminium EN47100 and in extruded aluminium, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in transparent 10mm thick and silicon gasket.
Reflector.
Screws in A2 stainless steel
Colours available: Metalgrey and Graphite
Included: 1 mt of cable H05RN-F, single connector IP68, ceiling/wall mounting plate.

IK08  
IP66 - 850°C




GU5,3 35W 12V  
GU5,3 4W 12V LED  
Max bulb dimension



IP6X



IPX6

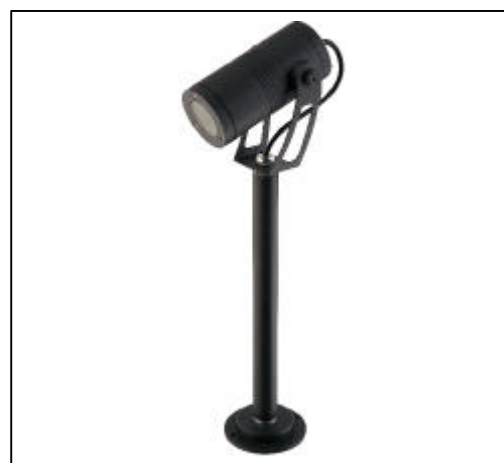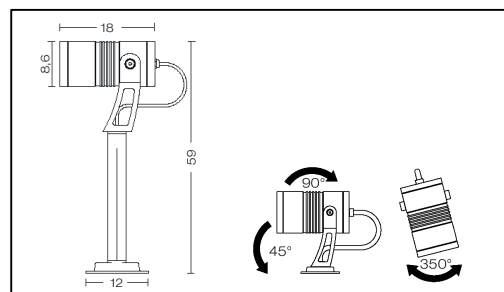

Photometric:

