

# Technical data sheet

All right reserved Landa illuminotecnica S.p.A.  
will reserve to change the specific note without  
any written notice.



**LANDA**<sup>®</sup>  
illuminotecnica

## Lyra 80


Article 467LS3 _ 467LL3
Product type spot or projector
Body material Die-casting aluminium EN47100 and in extruded aluminium, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in transparent 10mm thick and silicon gasket.
Screws in A2 stainless steel
Colours available: Metalgrey and Graphite
Beams: 467LS3 = 1x 10°+10° 467LL3 = 1x 45°+45°
Included: 1 mt of cable H05RN-F, single connector IP68, ceiling/wall mounting plate, transformer 240V to 12V

IK08  
IP66  
850°C

White LED 6300°K  
10°+10° 240 lm 3180 cd  
45°+45° 240 lm 320 cd  
High power LED 3W

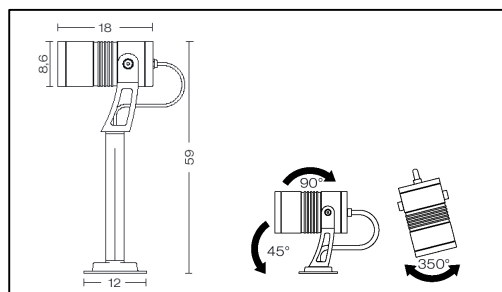

### Photometric:

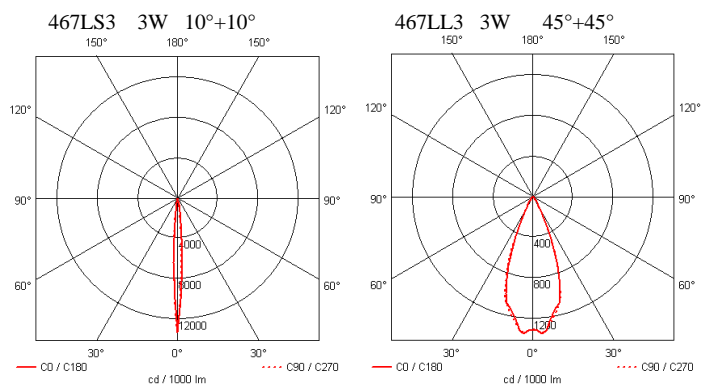

### Accessories

