

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.



LANDA[®]
illuminotecnica

Lyra 80


Article 468LS3X1 _ 468LL3X1
Product type ceiling, wall or projector
Body material Die-casting aluminium EN47100 and in extruded aluminium, prior the painting process, de-burred. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in transparent 10mm thick and silicon gasket.
Screws in A2 stainless steel
Colours available: Metalgrey and Graphite
Beams: 468LS3 = 1x 10°+10° 468LL3 = 1x 45°+45°

IK08
IP66
850°C

White LED 6300°K
10°+10°-240 lm-3180 lux-13230 cd
45°+45°-240 lm-320 lux-1330 cd
High power LED 3W



Photometric:

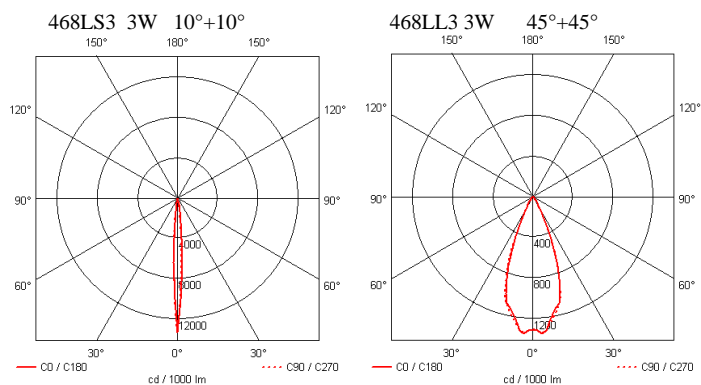

accessories



code 00K465.01
Visor



code 00K465.02
Reflector